




RANGE OF EQUIPMENT

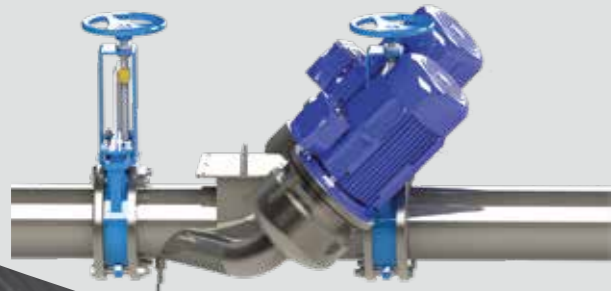

## COMPACT PUMPING STATION SIDINOX

Access hatch with anti-fall bars

Ready to install  
Quick to connect

Fitted with Direct In-Line  
pump system

Designed in stainless  
steel

Ranges from 1.2m  
to 2.5m in diameter

Clean and safe

Sump pump pit

Anti-float lip



### OverWatch® Direct In-Line Pump System




Distributor: Portugal, Spain, Saudi Arabia and African Continent

**DIBITEC - Sociedade de Construções e Representações, Lda.**  
Zona Industrial do Salgueiro Lote 2, 3530-259 MANGUALDE - PORTUGAL

T: (+351) 232 924 246

E: geral@dibitec.pt | dibitec@gmail.com

[www.dibitec.pt](http://www.dibitec.pt)



[www.dibitec.pt](http://www.dibitec.pt)

# PREFABRICATED LIFT STATION SIDINOX



**SIDINOX**, a new, READY TO INSTALL lift station concept, made from stainless steel with a 25 year warranty against corrosion.

- FULLY ECO-DESIGNED;
- COMPOSED IN STAINLESS STEEL, NON-OIL BASED MATERIALS;
- ECONOMICAL, ROBUST, INNOVATIVE AND SUSTAINABLE;
- DELIVERED READY TO INSTALL AND QUICK TO CONNECT;
- BENEATH ROAD SURFACES OR GREEN SPACES WITHOUT NEED FOR VALVE VAULT;
- EQUIPPED WITH OverWatch® PUMPING SYSTEM (no odors, no gas, no screening of trash, no wet well, no periodic cleaning needed).

- Basic and advanced modules enable you to set up the configuration that meets your own requirements.
  - Sidinox ranges from 1.2m to 2.5m diameter stainless steel (EN1.4306) sealed units which house all the equipment required for its operation.
  - The SIDINOX can be fitted with OW11-1.5kW up to OW151-55kW system.
  - They are pre-assembled with pipework, valves, access ladder and by electrical panel with ventilation.
- For over 10 years, we have continued to innovate and developed OverWatch® to make it not only the complete, clean, safe and environmentally friendly solution, but especially ECONOMICAL!  
Let's compare a traditional pumping system with the direct in-line pump system OverWatch®:



**Traditional installation with wet well**

**Installation with OverWatch®**

**Operation rate 24h**  
Traditional installation / OverWatch

Day	Traditional installation (%)	OverWatch (%)
0:00	0	0
2:00	0	0
4:00	100	0
6:00	100	0
8:00	100	0
10:00	100	0
12:00	100	0
14:00	100	0
16:00	100	0
18:00	100	0
20:00	100	0
22:00	100	0
23:00	100	0