



DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP

Connected simply and quickly
(2 possible inlets)

Clean, tankless, odorless
pumping system

Supplied with preset
electronic control unit

Vertical or horizontal
discharge



Stainless steel
construction

Sealed, silent and fully
automatic system

OverWatch[®] Direct In-Line Pump System




Distributor: Portugal, Spain, Saudi Arabia and African Continent

DIBITEC - Sociedade de Construções e Representações, Lda.
Zona Industrial do Salgueiro Lote 2, 3530-259 MANGUALDE - PORTUGAL

T: (+351) 232 924 246
E: geral@dibitec.pt | dibitec@gmail.com

www.dibitec.pt

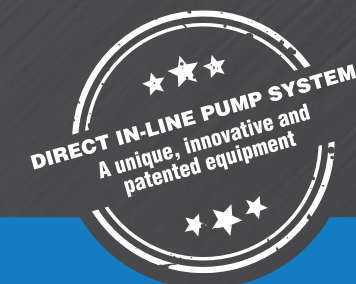


DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP



Small stainless steel lift station, to connect your home to the public sewage network.

Domestic wastewater evacuation system that connects to low pressure sewer line, when it is higher than the house, passes by mini-lift station. Instead of classical cumbersome smelly tank, with heavy maintenance and requiring regular cleaning, we suggest the OverWatch® (one pump) solution: "a Direct in- Line pump system without any tank, so no odor, no cleaning and easy maintenance.

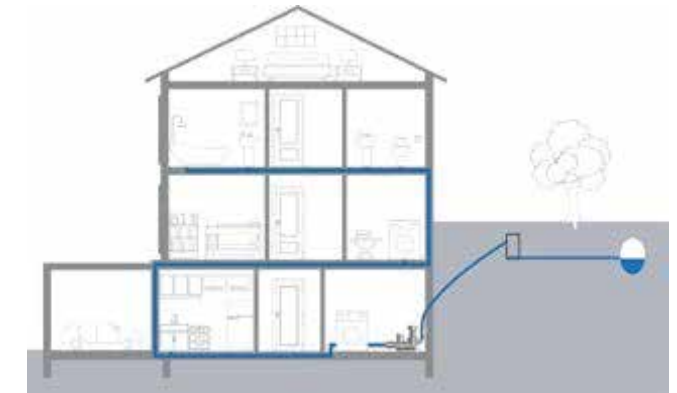

The OverWatch® systems are designed to be easily adapted to different types of installation with simplified start-up, operating and maintenance.

It is very easy to install. Most of the time the installation is made either in basements or garages.

Its design is based on the principle of effluent recovery by gravity.

The system is then odorless and does not require any cleaning. The electronic control unit is designed to automatically manage settings.

ADVANTAGES OF DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP

- Compact installation, takes very little space.
- Easy and convenient connections.
- Easy maintenance, no cleaning (visual check is sufficient).
- No odor.
- No wet well or tank to be buried, easy access.
- No clogging, no need of float switches, a flush is enough to make the system start, without consuming more energy than a typical grinder station.
- Robust stainless steel equipment (accepts detergents, hot water, wipes, etc.), pumped liquid temperature can be up to 60°C (140°F).
- Very silent system.
- No risk of overflow, the system is fully waterproof
- Industrial quality motor (IP67), with standard frame size and is repairable. No plastic parts.
- 3 years warranty.

