DIBITEC

RANGE OF EQUIPMENT

OverWatch® Direct In-Line Pump System

DIBITEC

Distributor: Portugal, Spain, Saudi Arabia and African Continent

DIBITEC - Sociedade de Construções e Representações, Lda.
Zona Industrial do Salgueiro Lote 2, 3530-259 MANGUALDE - PORTUGAL

T: (+351) 232 924 246
E: geral@dibitec.pt | dibitec@gmail.com
www.dibitec.pt

DIRECT IN-LINE PUMP SYSTEM
A unique, innovative and patented equipment

OverWatch®

DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP

Connected simply and quickly (2 possible inlets)

Clean, tankless, odorless pumping system

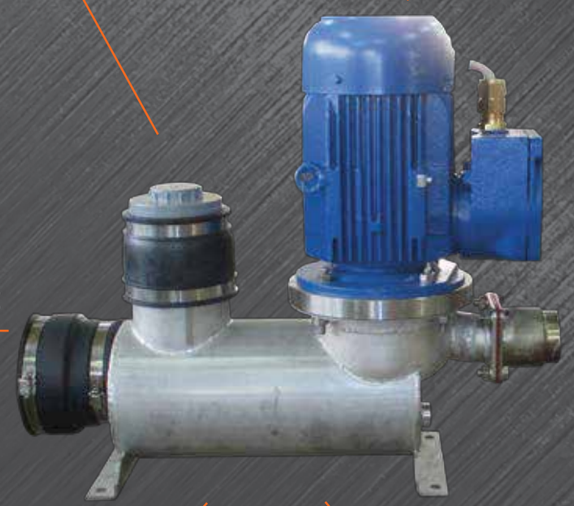

Supplied with preset electronic control unit

Vertical or horizontal discharge

Stainless steel construction

Sealed, silent and fully automatic system

DIRECT IN-LINE PUMP SYSTEM
A unique, innovative and patented equipment

DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP

Small stainless steel lift station, to connect your home to the public sewage network.

Domestic wastewater evacuation system that connects to low pressure sewer line, when it is higher than the house, passes by mini-lift station. Instead of classical cumbersome smelly tank, with heavy maintenance and requiring regular cleaning, we suggest the OverWatch® (one pump) solution:" a Direct in- Line pump system without any tank, so no odor, no cleaning and easy maintenance.

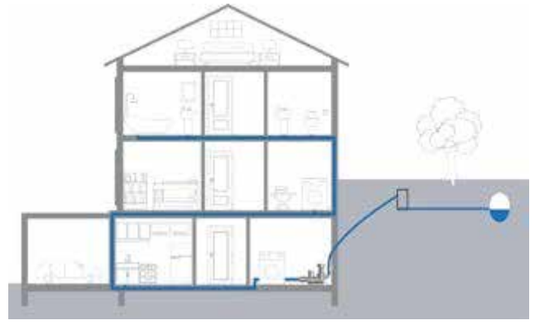

The OverWatch® systems are designed to be easily adapted to different types of installation with simplified start-up, operating and maintenance.
It is very easy to install. Most of the time the installation is made either in basements or garages.
Its design is based on the principle of effluent recovery by gravity.
The system is then odorless and does not require any cleaning. The electronic control unit is designed to automatically manage settings.

ADVANTAGES OF DIRECT IN-LINE PUMP SYSTEM WITH ONE PUMP

- Compact installation, takes very little space.
- Easy and convenient connections.
- Easy maintenance, no cleaning (visual check is sufficient).
- No odor.
- No wet well or tank to be burried, easy access.
- No clogging, no need of float switches, a flush is enough to make the system start, without consumming more energy than a typical grinder station.
- Robust stainless steel equipment (accepts detergents, hot water, wipes, etc.), pumped liquid temperature can be up to 60°C (140°F).
- Very silent system.
- No risk of overflow, the system is fully waterproof
- Industrial quality motor (IP67), with standard frame size and is repairable. No plastic parts.
- 3 years warranty.